
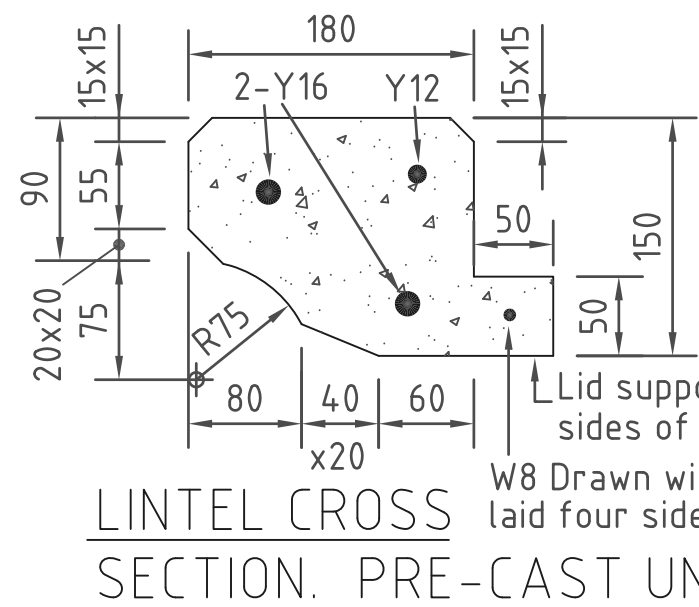


FLUTINGS TO PIT TYPE 'C' ONLY
 Flutings 40 pitch x 16 depth trowelled into concrete to give finished profile identical to Lysaght custom orb roof sheeting.


PLAN Pre-Entry must be used on all "on grade" pits.
GULLY PIT TYPE 'A'

SECTION Y - Y

PLAN - GULLY PIT TYPE 'B'

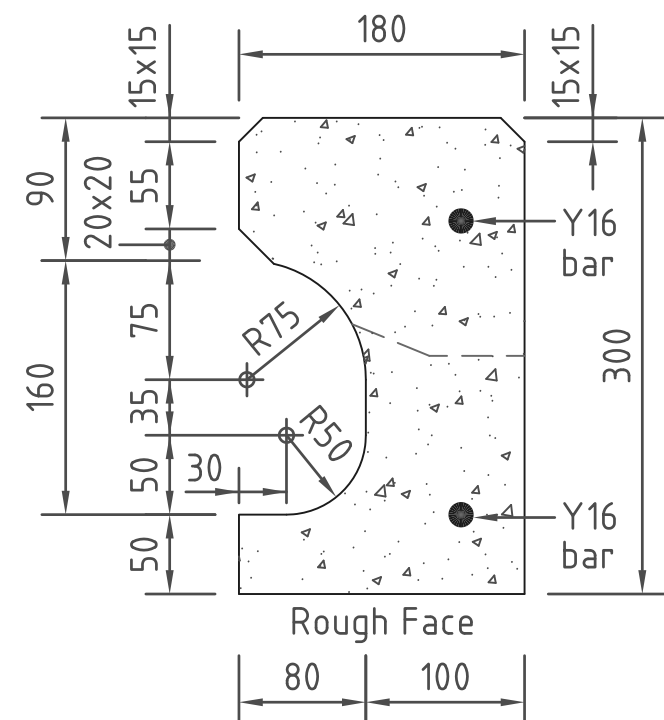

THESE DRGS ARE NOT TO SCALE.

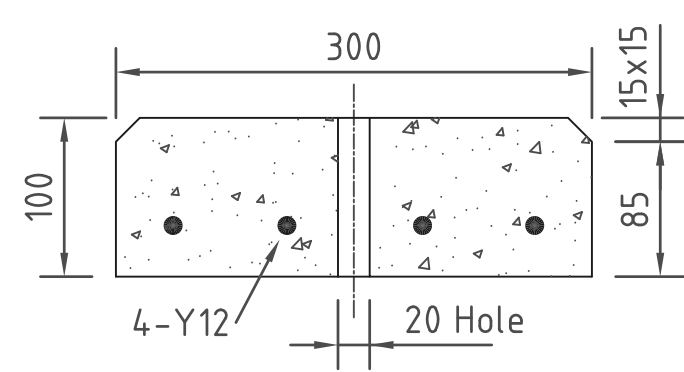

CROSS SECTION PRE-CAST COVER SLAB

(Overall Dimensions 300 x 1200)

PIT TYPE	USE
A	Where grade is between 1% & 12% (inclusive)
B	Where grade is less than 1%. (including sag)
C	Where grade is greater than 12%.

NOTE: Min' strength of concrete at 28 days to be 30MPa.

PRE-ENTRY CROSS SECTION PRE-CAST UNIT. Provide sockets to match lid surround bars.

(FOR TYPES) (A, B, & C)

C	12/02
B	12/96
A	01/85
Amendments	

SHIRE ENGINEER
 DATE

NOOSA SHIRE COUNCIL
 CATCHPITS
 KERB ENTRY TYPE